


INFILED

Screen your dreams

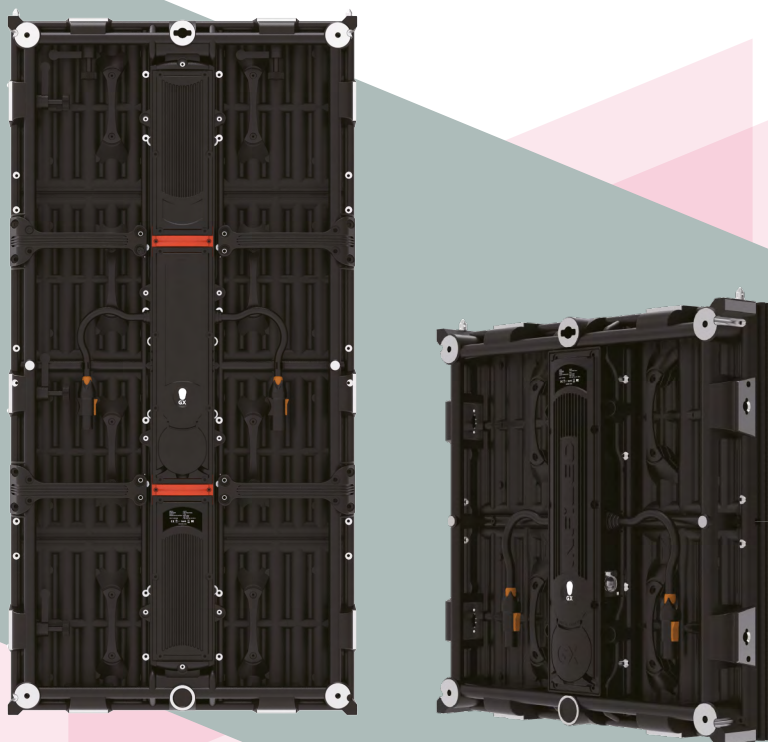

GXII

S E R I E S

RENTAL SOLUTIONS



The GXII Series is a lightweight LED display that features a waterproof and dustproof design, offers creative mounting possibilities, and many more advantages for indoor and outdoor rental applications.

Its upgraded design with enhanced corner protection protects the LED diodes from physical damage. Its lightweight and robust frame is made of die-cast magnesium and aluminium alloy, and is easy to assemble and disassemble. It comes in two different cabinet sizes of 500x1000 mm and 500x500 mm, and allows the creation of a concave or convex.

±10°curve. The GXII series is an ideal solution for applications such as concerts, outdoor advertising, conference centres, venues, and more.

Lightweight, waterproof and dustproof design.



IP65



Lightweight




Corner
Protection



Concave
& Convex


Pixel Pitch	1.9, 2.5, 2.6, 2.9, 3.9, 4.8 mm
Brightness	800 - 1500 nits
Cabinet size (WxHxD)	500 x 500 x 75.2 mm

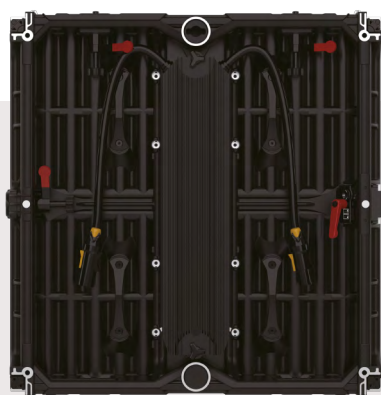

KEY FEATURES

Curving systems

Concave & convex $\pm 10^\circ$ with five adjustable angles for creative stage designs.

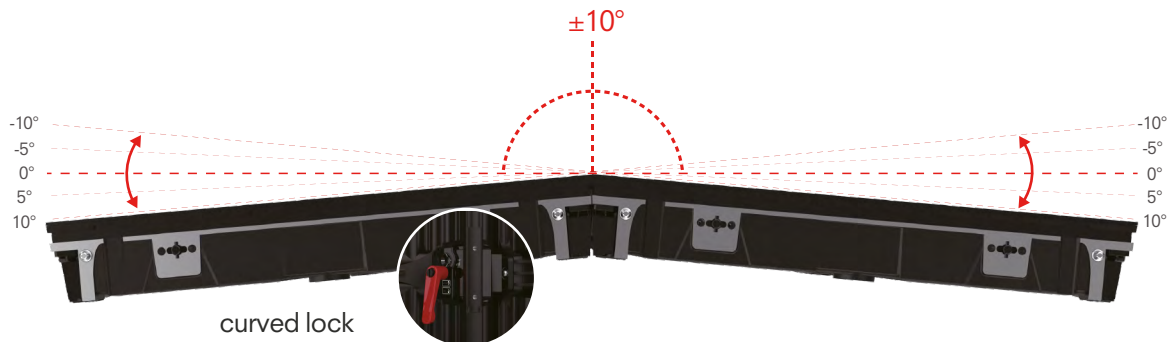

Corner protection

Retractable corner protection on each cabinet. The protection can be opened when the cabinet is at the corner of the screen to prevent the LED diodes from being damaged.



Easy installation & maintenance

Exchangeable power and data unit.
Fast and tool-free disassembly, with front and rear access for maintenance.

Energy saving


The GXII series includes IC, 4.5V Low power function.

Flexible system

Various creative connection possibilities to form asymmetrical shapes.



This series can also be customized to form a right-angle shaped corner screen.

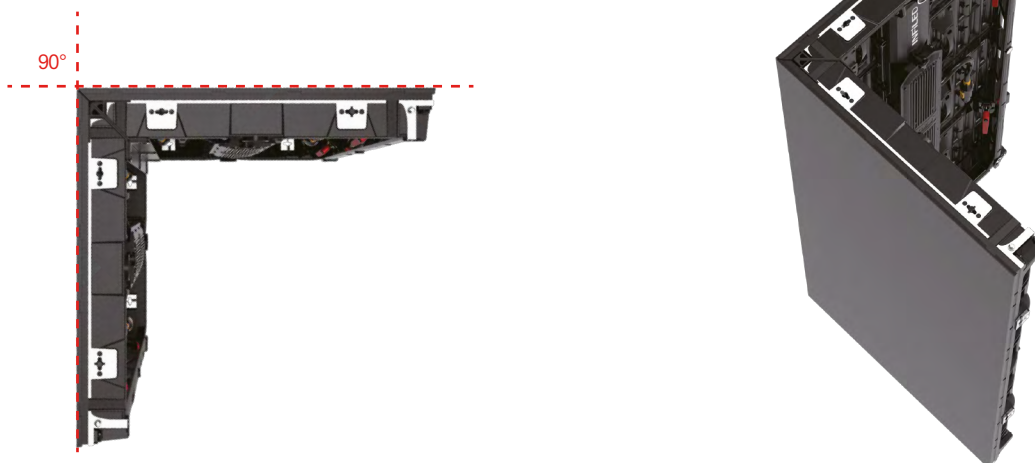

SPECIFICATIONS

Indoor

Model Number	GXII 1.95	GXII 2.5	GXII 2.6	GXII 2.97	GXII 3.91	GXII 4.81
Pixel Pitch	1.95mm	2.5mm	2.6mm	2.97mm	3.91mm	4.81mm
Physical Density	262,144 pixels/m²	160,000 pixels/m²	147,456 pixels/m²	112,896 pixels/m²	65,536 pixels/m²	43,264 pixels/m²
LED Arrangement	3 IN 1 SMD	3 IN 1 SMD	3 IN 1 SMD	3 IN 1 SMD	3 IN 1 SMD	3 IN 1 SMD
Module Dimensions	500×250mm	500 x 250mm	500×250mm	500×250mm	500×250mm	500×250mm
Module Resolution	256 x 128pixels	200 x 100 pixels	192 x 96pixels	168 x 84pixels	128 x 64 pixels	104 x 52pixels
Cabinet Dimensions	500 x 1000 x 75.2 mr	500 x 1000 x 75.2 mr	500 x 1000 x 74.6mmr	500 x 1000 x 75.2mmr	500 x 1000 x 75.2mmr	500 x 1000 x 75.2mm
Cabinet Resolution	256 x 512pixels	200 x 400 pixels	192 x 384 pixels	168 x 336 pixels	128 x 256 pixels	104 x 208 pixels
Cabinet Weight	13.5 Kg	13.5 Kg	14.5 Kg	13.5 Kg	13.5 Kg	13.5 Kg
Brightness	800nits	1,000nits	1,500nits	1,000nits	1,000nits	1,000nits
Max. Power Consumption	260w/panel	300w/panel	360w/panel	300w/panel	300w/panel	300w/panel
Avg. Power Consumption	87w/panel	100w/panel	120w/panel	100w/panel	100w/panel	100w/panel
Viewing Angle	160°/160°	160°/160°	160°/160°	160°/160°	160°/160°	160°/160°
Operating Power Source	AC200-240V 50-60H	AC200-240V 50-60H	AC200-240V 50-60H	AC200-240V 50-60H	AC200-240V 50-60H	AC200-240V 50-60Hz
Operating Temperature	-10°C~+45°C	-10°C~+45°C	-10°C~+45°C	-10°C~+45°C	-10°C~+45°C	-10°C~+45°C
Refresh Rate	3,840Hz	3,840Hz	7,680Hz	3,840Hz	3,840Hz	3,840Hz
IP Rating	IP30	IP30	IP30	IP30	IP30	IP30
Signal Input Source	DVI, HDMI, DP, MINI DP, VGA, SDI, HD SDI					
Certification	CE, CB, FCC, CCC, RoHS,					

Outdoor

Model Number	GXII 3.91	GXII 4.63	GXII 5.95	GXII 6.94
Pixel Pitch	3.91mm	4.63mm	5.95mm	6.94mm
Physical Density	65,536 pixels/m²	46,656 pixels/m²	28,224 pixels/m²	20,736 pixels/m²
LED Arrangement	3 IN 1 SMD	3 IN 1 SMD	3 IN 1 SMD	3 IN 1 SMD
Module Dimensions	500×250mm	500 x 250mm	500 x 250mm	500×250mm
Module Resolution	128 x 64pixels	108 x 54pixels	84 x 42pixels	72 x 36 pixels
Cabinet Dimensions	500 x 1000 x 75.2mm	500 x 1000 x 76.8 mm	500 x 1000 x 76.8 mm	500 x 1000 x 76.3 mm
Cabinet Resolution	128 x 256 pixels	108 x 216 pixels	84 x 168 pixels	72 x 144 pixels
Cabinet Weight	13.5 Kg	13.5 Kg	13.5 Kg	13.5 Kg
Brightness	5,000nits	5,000nits	5,000nits	5,000nits
Max. Power Consumption	340w/panel	340w/panel	340w/panel	340w/panel
Avg. Power Consumption	113w/panel	113w/panel	113w/panel	113w/panel
Viewing Angle	160°/155°	160°/135°	160°/135°	160°/130°
Operating Power Source	AC200-240V 50-60Hz	AC200-240V 50-60Hz	AC200-240V 50-60Hz	AC200-240V 50-60Hz
Operating Temperature	-10°C~+45°C	-10°C~+45°C	-10°C~+45°C	-10°C~+45°C
Refresh Rate	3,840Hz	3,840Hz	3,840Hz	3,840Hz
IP Rating	IP65 (Front) / IP54 (Rear)	IP65(Front) / IP54 (Rear)	IP65(Front) / IP54 (Rear)	IP65 (Front) / IP54 (Rear)
Signal Input Source	DVI, HDMI, DP, MINI DP, VGA, SDI, HD SDI			
Certification	CE, CB, FCC, CCC, RoHS,			

The product specifications can be customized

© Copyright 2023 INFILED. INFILED is a trademark of SHENZHEN INFILED ELECTRONICS Co, LTD. The information contained herein is subject to change without notice. INFILED shall not be liable for technical or editorial errors or omissions contained herein. For more information, please contact your local sales manager. March 2023



Shenzhen HQ | Barcelona | Dubai | Rotterdam | Los Angeles | Kuala Lumpur

For more information, contact:
info.emea@infiled.com



www.infiled.com