


INFiLED

Screen your dreams

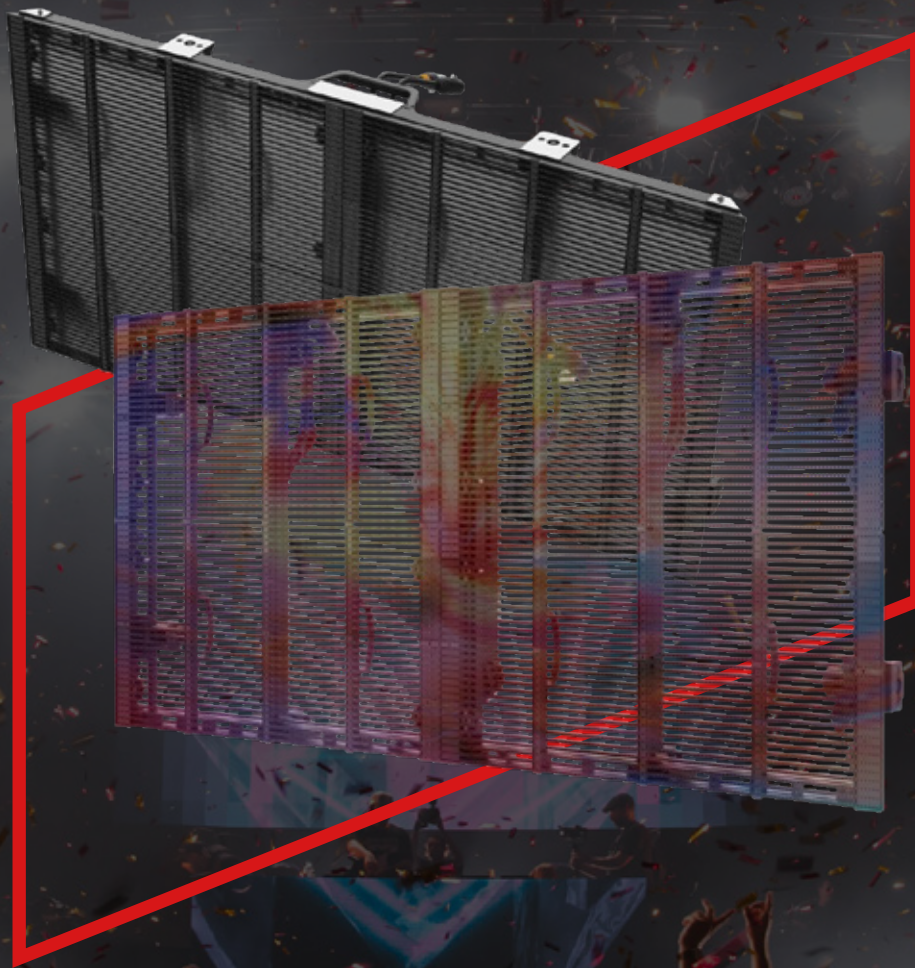

HoloLight

SERIES

A transparent screen for creative rentals


CONCERT | FESTIVAL | SPORTS

DISCOVER A REALM OF VISUAL CREATIVITY WITH HoloLight

The HoloLight display is designed for cutting-edge LED applications in rental settings, such as concerts, music festivals, and sporting events. This series of cabinets boasts high transparency and offers adjustable curvature capabilities, enabling the creation of uniquely visual screens.


◆ Unique Visual Presentation

This series of screens features eye-catching images at 50% transparency, effectively capturing the audience's attention.

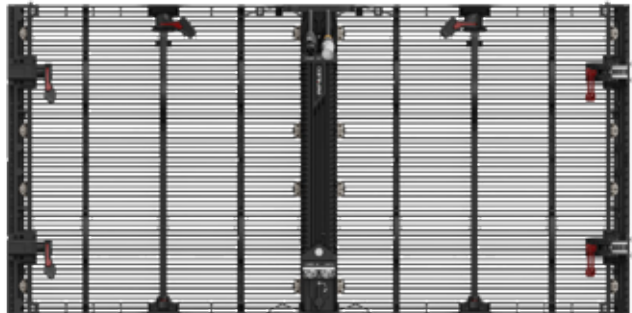

◆ Simplified Curvature Settings

Cabinets with curved connectors on the sides can be linked together to create a curved screen that ranges from -15° to $+15^{\circ}$ (adjustable in 2.5° increments).

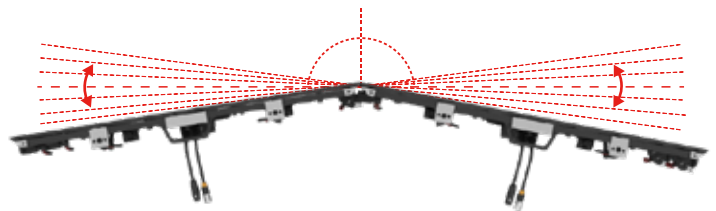

In addition, HoloLight can be assembled into a right-angled structure, enabling more creative displays with ease.



ENSURE STABLE USE OF THE SCREEN WITH STRONG PROTECTIVE CAPABILITIES

This set of cabinets features bump protection and provides enhanced safety against fire and various environmental hazards, ensuring screens deliver impressive visual effects while maintaining reliable performance.

◆ Practical Cabinet Design

HoloLight features a back-shelled module and metal protection strips to improve stability and prevent damage during transport and installation. This design helps prevent LED surface warping and enhances durability.



◆ Strong Protective Ability

The HL series screens are rated UL94 V-0 for fire safety and have an IP65 protection rating, ensuring they are resistant to flames, dust, and moisture. They perform effectively in various weather conditions, including extreme heat and heavy rainfall.

A WELL-DESIGNED INSTALLATION SYSTEM BOOSTS SCREEN SETUP EFFICIENCY

This product is ideally sized and weighted for rentals, ensuring easy transport and setup. It boasts a clever cabinet design that facilitates quick assembly and disassembly. Furthermore, it can connect with the AP series cabinets for rentals, creating unique LED display solutions.




◆ Effortless Installation Process

The cabinet measures 1000*500 mm and weighs 7.5kg. Its ergonomic handle design makes it easy for staff to install the screen.

◆ Cabinet Connection Mechanism

Positioning pins ensure precise cabinet alignment, while the pre-lock mechanism assists with fast and stable setup during installation.

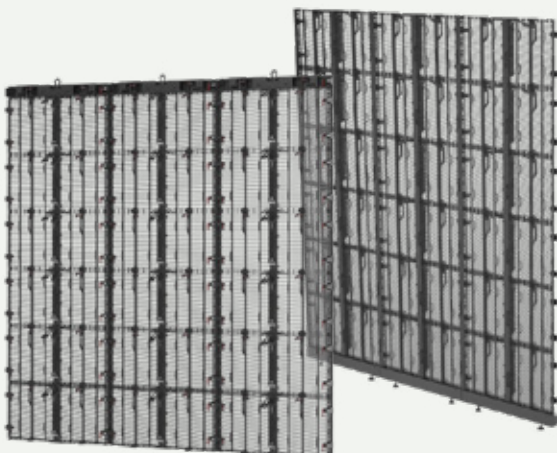

◆ Flexible Installation Options

HoloLight supports both hanging and stacking installations, with a maximum screen height of up to 9 meters.

A SIMPLE MAINTENANCE PROCESS ALLOWS THE SCREEN TO OPERATE EFFICIENTLY WITHOUT INTERRUPTIONS

The design of this series of screens incorporates removable parts and facilitates easy disassembly, which significantly simplifies the maintenance process. This thoughtful engineering allows users to quickly access and replace components as needed, ensuring that upkeep can be performed efficiently and without hassle.

◆ LED Module

LED modules support both front and rear access. They can be removed quickly using a T-shaped wrench, ensuring efficient on-site maintenance.




◆ Control Unit

The control unit is accessible from the rear and features a tool-free design, allowing for fast removal and streamlined servicing.



SPECIFICATIONS

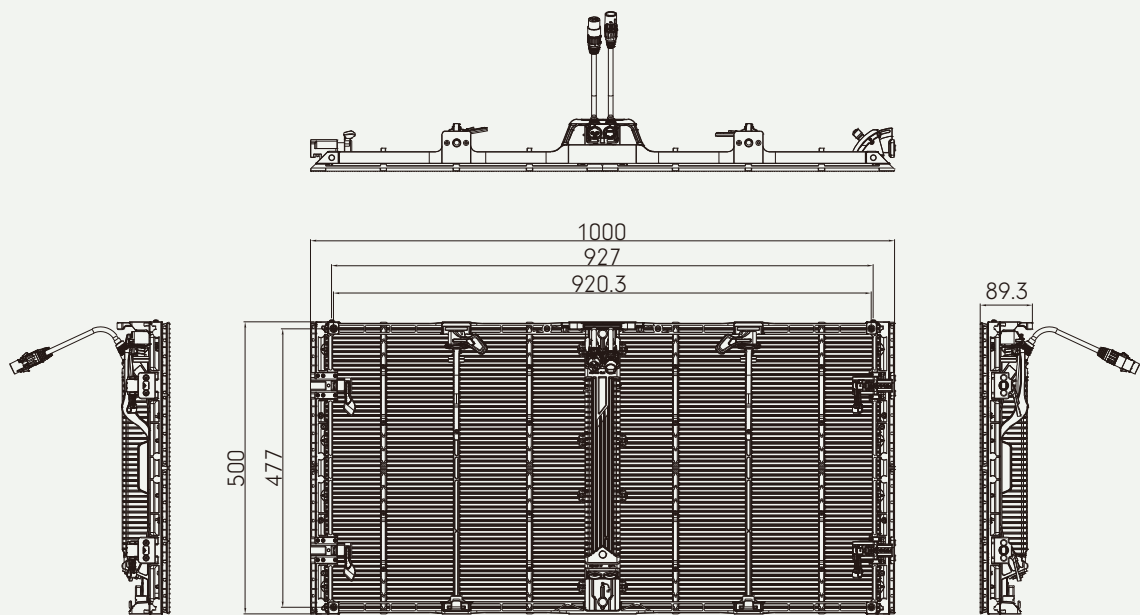

HL3978 Specification

General Information	Model Number	IL-RSS-ORHL3978
	Pixel Pitch	H: 3.9mm, V: 7.8mm
Physical Parameter	Physical Density	32,768pixels/m ²
	LED Arrangement	3 IN 1 SMD
	Module Dimensions	500 x 250 mm (19.69 x 9.84 in)
	Module Resolution	128 x32 pixels
	Cabinet Dimensions	1000 x 500 x 89.3 mm (39.37 x 19.69 x 3.52 in)
	Cabinet Resolution	256 x 64 pixels
	Cabinet Weight	7.5kg (16.54lb)
	Transparent Ratio	50%
Optical Parameter	Brightness	4500nits
	Viewing Angle	160°/160°
Power Supply	Max Power Consumption	525W/m ²
	Avg Power Consumption	175W/m ²
	Operating Power Source	100-240V AC 50-60Hz
Control System	Refresh Rate	7680Hz
	Signal Input Source	DVI, HDMI, DP, SDI
Operation Conditions	Operating Temperature	-20 C ~+50 C
	IP Rating (Front/Rear)	IP65
	Certification	CE

The product specifications can be customized.

HoloLight

SERIES

A transparent screen for creative rentals

CONCERT | FESTIVAL | SPORTS

INFILED

Screen your dreams

CHINA | SPAIN | NETHERLANDS | GERMANY | UAE | USA | JAPAN | MALAYSIA | SINGAPORE
SOUTH KOREA | AUSTRALIA | NEW ZEALAND | COLOMBIA | INDONESIA | UK



www.infiled.com

For more information, contact:
info@infiled.com